




1.AF001 Throttle Body Air Foil

Parts List

- Air Foil Body
- 10-32 Allen Bolt
- Billet Nut

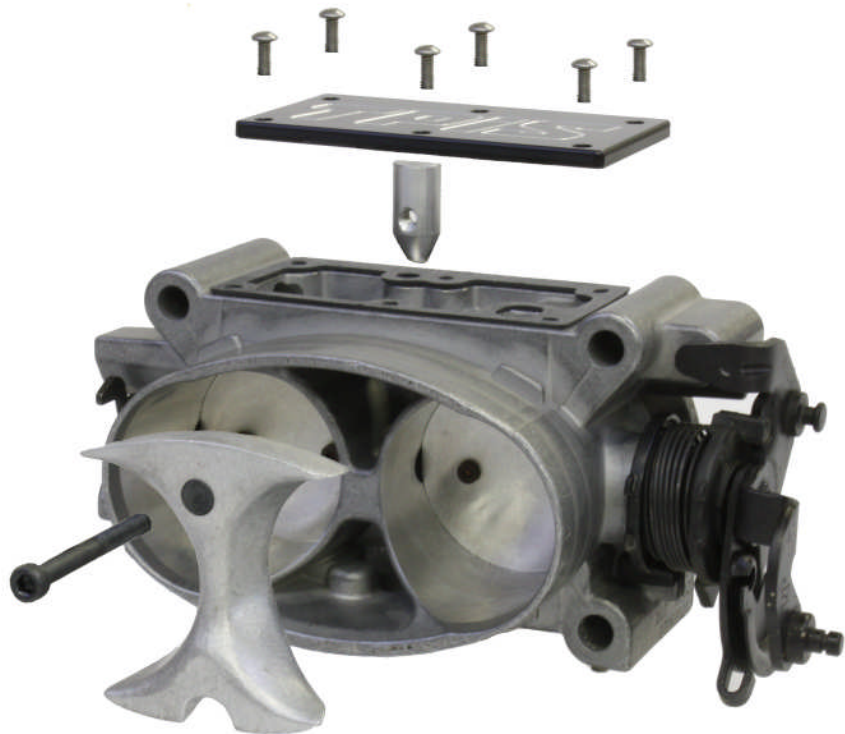

1. Remove the rubber air duct attached to the front of the throttle body.
2. Remove the six screws and cover from top of throttle body.
3. Insert billet nut in the centrally located hole under the cover. Keep the round half of the nut towards the front of the car.
4. Slip the Allen bolt through the hole in the air foil and slide it into position between the two bores of the throttle body.
5. Using a 5/32" Allen wrench, move the bolt around until you feel the bolt find the hole in the nut. You may need to maneuver the nut so it is straight up and down to prevent cross-threading.
6. Tighten the air foil bolt.
7. Replace the cover and six screws.
8. Replace rubber air duct.